



Digilube Systems, Inc.
216 East Mill St.
Springboro, Ohio 45066; USA
1-800-837-5667 www.airid.com

Drain Minder II Automatic Timer




Part # J-1440001

Maximize your air system performance by continuously draining systems of condensate which collects in aftercoolers, receivers, air dryers, filters, separators, drop legs, etc. With its unique design, you can run up to 5 Moisture Minder® Drain valves from the controller at distances up to 100 feet. This allows your air system to be drained without opening it to the atmosphere, saving many dollars per month in wasted air alone.

The Drain Minder II uses a pilot signal to control drain valves instead of electricity, this saves on hard-wire installations and the moisture minder drains witch can be used in explosion-proof area

The Drain Minder II controller is installed in the typical system by teeing into a filtered air supply and connecting the supply line to the inlet side of the controller (150 PSI Max.). The controller can be mounted on the wall or other stationary surfaces with the mounting bracket provided.

DRAIN MINDER II SHOWN WITH A TYPICAL MOISTURE MINDER INSTALLATION.

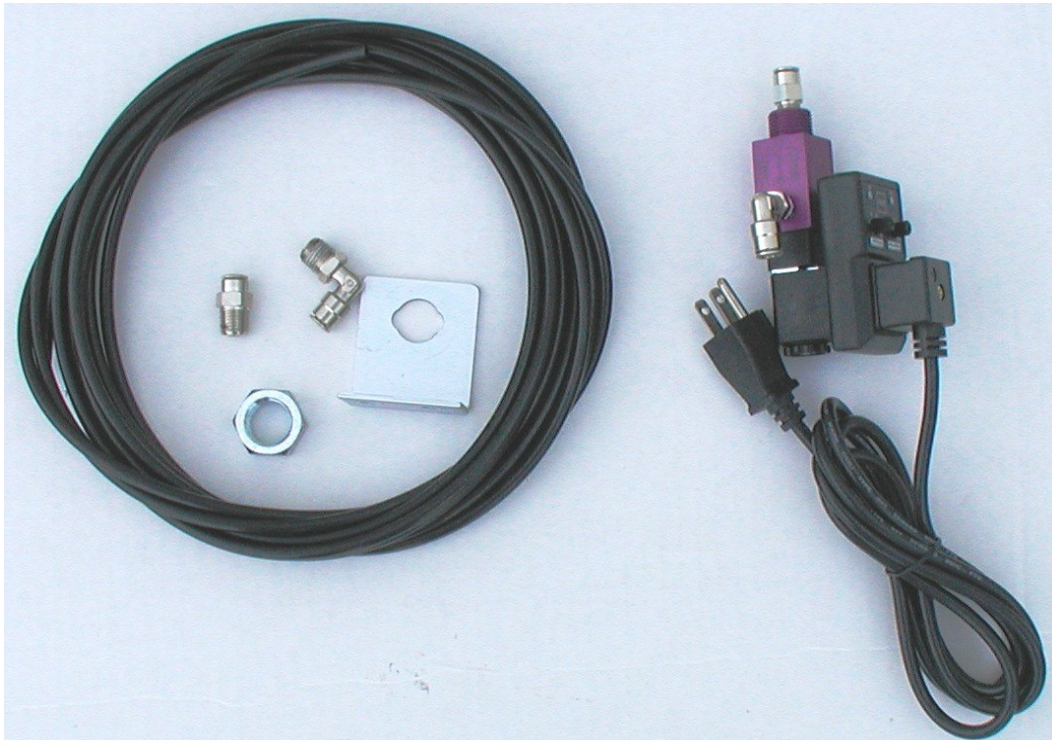

***Note up to five additional MOISTURE MINDER drains can be added by teeing into the outlet or pilot line. Each time the control turns on a pilot signal will be sent to actuate the MOISTURE